

### ATOSA USA, INC.

Toll Free: 855-855-0399 Email: info@atosausa.com www.atosa.com | www.atosausa.com California, Colorado, Florida, Georgia, Illinois, New Jersey, Ohio, Texas, Washington

#### **MODELS:**

MBF8010GR / MBF8010GRL

# Top Mount 1/2 Door Reach-In Refrigerators

## **Standard Features**

- Top mount compressor with environmentally friendly R290 refrigerant
- Stainless steel exterior & interior
- Electronic Temperature Controller
- Maintains temperatures between 33°F 40°F
- LED interior light(s)
- Recessed door handle(s)
- Door lock(s) standard
- Magnetic door gasket(s) standard for positive door seal
- Pre-installed casters
- Three (3) pre-installed shelves per section
- Down duct refrigeration to ensure even distribution of air

# **Optional Accessories**

 Extra shelves – includes 4 shelf clips per shelf, shelf part #: W0402389

For the best results of food preservation we recommend setting your refrigerator between 33  $^{\circ}F$  to 38  $^{\circ}F$ 

- 1. Don't forget to leave the unit some room to breathe!
- 2. Please clean the condenser frequently to give the unit more fresh air.



**MBF8010GR** 



\*L indicates left hand model















## ATOSA USA, INC.


Toll Free: 855-855-0399 Email: info@atosausa.com www.atosa.com | www.atosausa.com

California, Colorado, Florida, Georgia, Illinois, New Jersey, Ohio, Texas, Washington

## **SPECIFICATIONS**

Models	Door	Capacity (Cu.Ft.)	Shelves	Casters (inch)		Voltage (V/Hz/Ph)	HP	Refrigerant	Exterior Dimensions (inch)	Net Weight (lb)	Gross Weight (lb)
MBF8010GR	2	21.4	3	4	2.1	115/60/1	1/7	R290	28 <sup>7/10</sup> ×31 <sup>7/10</sup> ×81 <sup>3/10</sup>	254	271
MBF8010GRL											

## **PLAN VIEW**

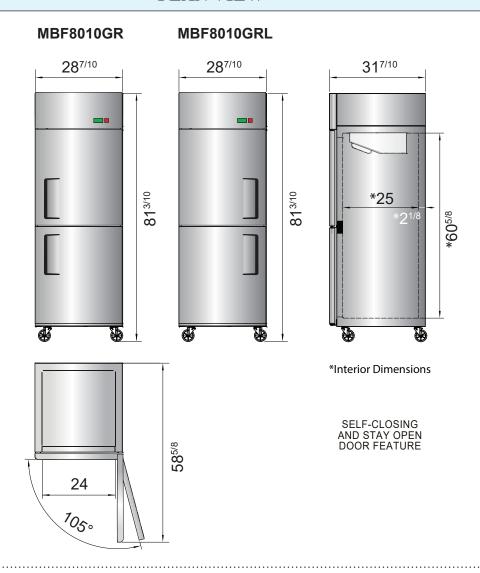

Casters Epoxy shelves Door lock Down duct Temperature control



